## **B0034** MARINE LOADING ARM



## **DESIGN FEATURES**

- \* Sizes from 4" up to 16"
- Pressure ratings from PN 10 up to PN 40
- Materials: carbon steel, low temperature steel, stainless steel
- \* Temperature range: from -50 °C up to +200 °C
- Customized solutions on request
- \* EMCO high performance swivel joints

The B0034 Marine loading arm is designed to serve big tanker ships up to 250.000 DWT and to meet the most stringent specifications and requirements of the petrochemical industry. Its capability has been proven with many years of trouble free operation worldwide.

The B0034 design includes a special support frame for the inboard arm and a rigid link pantograph balancing system with independent counterweights directly linked to the inboardand outboard arm.

Thus providing that accurate balance is definitely ensured throughout all manoeuvring and connecting positions.

The special design of the inboard arm support structure additionally provides the optimum in regards to operational safety aspects, low weight of the arm and lowest wind loads imposed to the jetty structure.

The advantages over hose loading facilities are ease of handling, higher availability/flexibility, less man power and minimum maintenance required while providing maximal operational safety and minimized operational cost (cost of ownership).

The B0034 is designed for hydraulic operation and can be fitted with the most sophisticated ancillary equipment.


Additional equipment is available.

B0034

# **B0034** MARINE LOADING ARM

### MATERIALS AND TECHNICAL DATA - INCL. EMERGENCY RELEASE SYSTEM

8" 7000 1500 10000 10000 1350 6000 1100 190 490   10" 8000 1500 10000 10000 1750 7000 1700 240 760	NB	A + B	Х	С	D	N	S	Flow rate	Weight	Bending moment
10" 8000 1500 10000 10000 1750 7000 1700 240 760		mm	mm	mm	mm	mm	mm	m³/h	kN	kNm
	8"	7000	1500	10000	10000	1350	6000	1100	190	490
12" 8000 1500 12000 12000 2100 7000 2500 320 850	10"	8000	1500	10000	10000	1750	7000	1700	240	760
	12"	8000	1500	12000	12000	2100	7000	2500	320	850
16" 8000 1500 13000 13000 2400 7000 4000 380 970	16"	8000	1500	13000	13000	2400	7000	4000	380	970

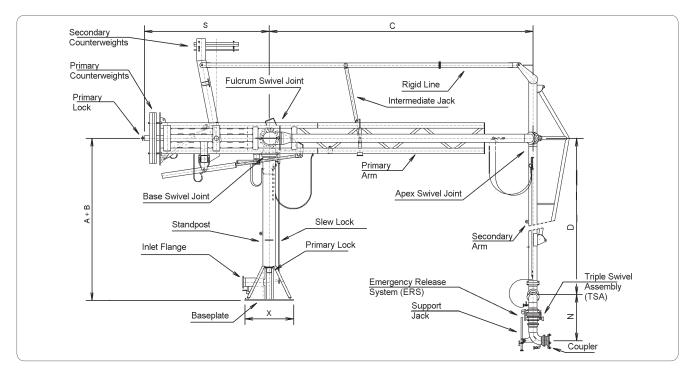

#### **DESIGN**

- \* Fully balanced with independent counterweights for inboard and outboard arm
- \* Special support frame to reduce imposed mechanical loads
- \* Light weight design
- \* Swivel joints either welded-in or flanged
- \* For transfer of mineral oil, chemicals, and liquefied gases (incl. LNG)
- Seals available in Buna-N, Viton, PTFE or other specific materials

#### **ACCESSORIES**

- \* Range alarm system
- \* Drainage connections
- \* Emergency release system (ERS)
- \* Hydraulic operation
- \* Hydraulic or manual quick coupler
- Insulation flange
- \* Nitrogen purge line
- \* drain line
- \* Vacuum breaker
- \* Vapour return line











A Gardner Denver Product